

# MICROMIXER™

## FOUR-INPUT STEREO MIXER

### Product Description

MicroMixer is a 4-input, 2-output stereo mixer for line-level sources. MicroMixer is a perfect utility mixer with numerous uses: combining 2 stereo sources to a stereo output; combining up to 4 mono sources; mixing mono and stereo sources to a stereo output. Each balanced bridging input will accept a balanced or unbalanced source.


A level control for each input provides adjustment from OFF to +10dB of gain.

"MicroAssign" switches permit any input signal to be routed to either the Left, Right, or both outputs. Audio inputs and outputs are on plug-in euroblock connectors.

MicroMixer is 1/3 rack width and can be mounted in an optional rack shelf, or wall mounted with optional wall/cabinet mounting brackets. MicroMixer is powered by an internal AC power supply.



Front


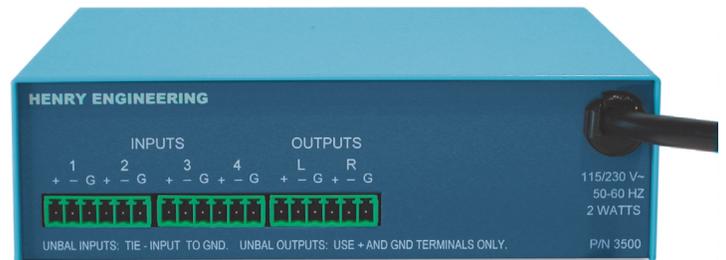


Back

### Technical Specifications

Input Level	-10 to +8 dBm
Input Impedance	20K ohms bal, 10K ohms unbal
Output Level	+4 dBm nominal, +26 dBm max
Output Load	600 ohms or higher per output, bal
Controls	Input gain, Output assign
Gain	OFF to +10 dB
Frequency Response	DC to 20kHz, 0.25 dB
Distortion	<.01% IM/THD
Noise	>80 dB below nominal output, typ
Power Requirements	115/230VAC, 50/60Hz, 3 W
Construction	Steel enclosure
Physical	5.7" w X 1.7" h X 6.0" d, 3lbs
Mounting	Table top, optional rack mount shelf, optional wall/cabinet mounting brackets
Approval	City of Los Angeles Elect. Test Lab

### Typical Application

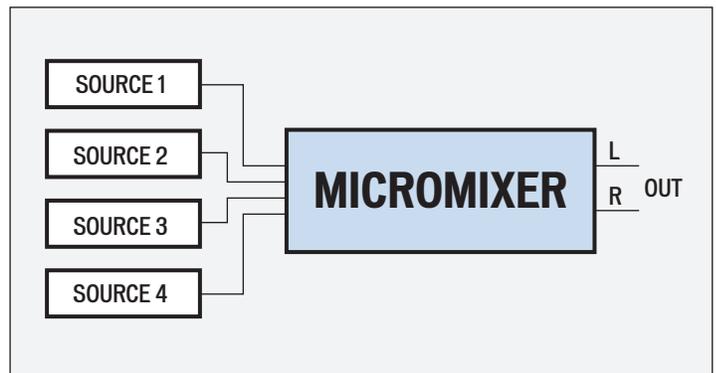

Plug-in Installation



No Wall-Warts!



Rack Mountable

Technical specifications subject to change without notice.